

# AZX

## SPEAKER SYSTEMS

### Guter Klang zum fairen Preis

Die AZX-Serie von Omnitronic bietet Ihnen robuste, zuverlässige Lautsprecher mit ausgewogenem Klang zum fairen Preis. Dank ihres multifunktionalen Designs sind die Boxen für verschiedenste Anwendungszwecke geeignet: als Party-PA, im Jugendzentrum, für den Live-Auftritt Ihrer Band oder im mobilen Einsatz als DJ.


- \_ Ausgewogener, guter Klang
- \_ Flexible Einsatzmöglichkeiten: Installation, Bühne, mobiler Einsatz
- \_ Tops können auf den Subs oder einem Stativ montiert oder fliegend betrieben werden
- \_ Zweifache Flansch ermöglicht die Montage der Tops in 0° oder 5° Neigungswinkel
- \_ Stabile Holzgehäuse (15 mm MDF) mit Strukturlack, Akustikschaumstoff hinter den Metallgittern

UVP  
ab 109,-

### Good sound at a fair price

The AZX Series from Omnitronic offers you robust, reliable speakers with balanced sound at a fair price. Thanks to their multifunctional design, the speakers are suitable for a wide range of applications: as party PA, in youth centres, for the live performance of your band or for mobile use as a DJ

- \_ Balanced, good sound in active or passive versions
- \_ Flexible use: Installation, stage, mobile use
- \_ Tops can be mounted on subs, on stands or also suspended
- \_ Double flange enables mounting with an angle of 0° or 5°
- \_ Stable wooden housings (15 mm MDF) with structured lacquer, acoustic foam behind the metal grilles

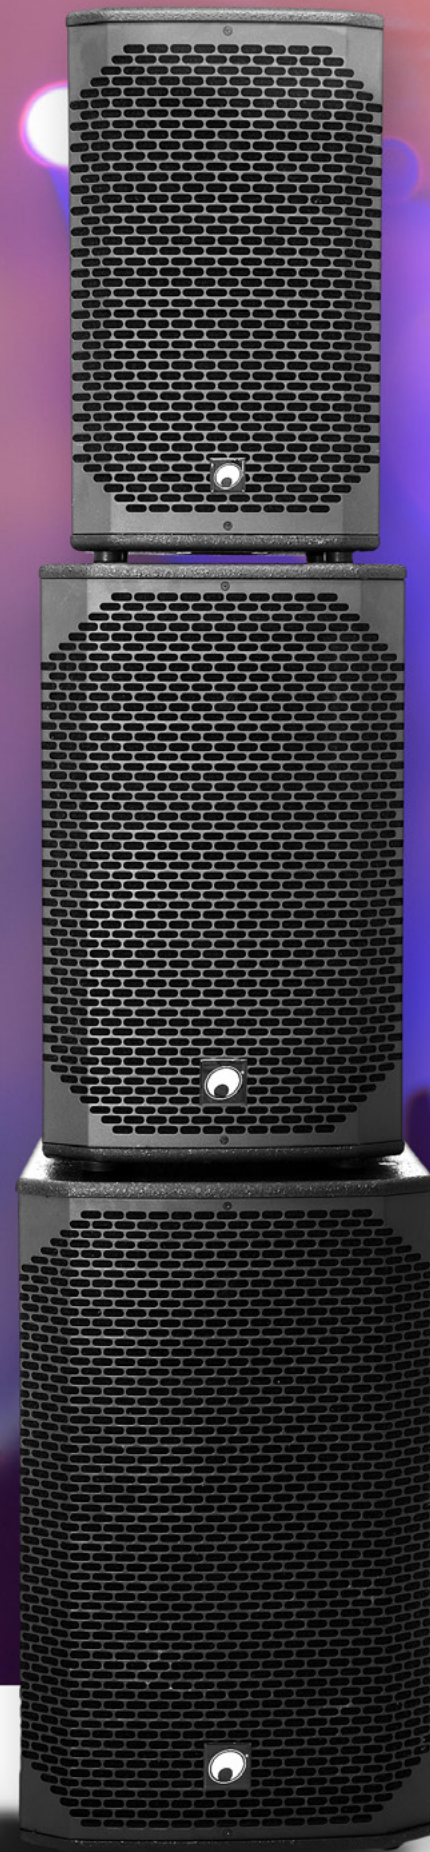



#### Technical specifications:

Device:	AZX-208	AZX-210	AZX-212	AZX-212A	AZX-215	AZX-215A
Power supply:				230 V AC, 50 Hz		230 V AC, 50 Hz
Power consumption:				650 W		650 W
Amplifier power:						300 W RMS LF, 50 W RMS HF
Rated power:	100 W RMS	200 W RMS	200 W RMS		300 W RMS	
Program power:	200 W	400 W	400 W		600 W	
LF speaker:	20 cm bass/mids (8") with 38 mm voice coil 2.5 cm compression driver (1")	25 cm bass/mids (10") with 50 mm voice coil 2.5 cm compression driver (1")	30 cm bass/mids (12") with 50 mm voice coil 3.5 cm compression driver (1.35")	30 cm bass/mids (12") with 50 mm voice coil 3.5 mm compression driver (1.35") combination XLR/6.3 mm jack, bal.	38 cm bass/mids (15") with 76 mm voice coil 4.5 cm compression driver (1.75")	38 cm bass/mids (15") with 76 mm voice coil 4.5 cm compression driver (1.75") combination XLR/6.3 mm jack, bal.
HF speaker:						
Input mic/line:						
Output line:				XLR, bal.		XLR, bal.
Connection:	2 x Speaker	2 x Speaker	2 x Speaker		2 x Speaker	
Sensitivity:	91 dB	93 dB	94 dB	95 dB	94 dB	
Frequency range:	65 - 18000 Hz	60 - 18000 Hz	55 - 18000 Hz	55 - 20000 Hz	50 - 20000 Hz	50 - 20000 Hz
Number of bass-woofer:	1 Pc/Pcs	1 Pc/Pcs	1 Pc/Pcs	1 Pc/Pcs	1 Pc/Pcs	1 Pc/Pcs
Size of woofer:	20 cm (8")	25 cm (10")	30 cm (12")	30 cm (12")	38 cm (15")	38 cm (15")
Material:	MDF (Medium-density fibreboard)	MDF (Medium-density fibreboard)	MDF (Medium-density fibreboard)	MDF (Medium-density fibreboard)	MDF (Medium-density fibreboard)	MDF (Medium-density fibreboard)
Loudspeaker control:	8 Ohm	8 Ohm	8 Ohm		8 Ohm	
Weight:	9.35 kg	13.10 kg	17.10 kg	19.15 kg	23.40 kg	25.45 kg
Width:	31,5 cm	37 cm	43 cm	43 cm	48,5 cm	48,5 cm
Depths:	31 cm	36 cm	40,5 cm	40,5 cm	48 cm	48 cm
Height:	49 cm	58,5 cm	67 cm	67 cm	75 cm	75 cm



#### Technical specifications:

Device:	AZX-112	AZX-112A	AZX-115	AZX-115A	AZX-118	AZX-118A
Power supply:		230 V AC, 50 Hz		230 V AC, 50 Hz		230 V AC, 50 Hz
Power consumption:		650 W		650 W		650 W
Amplifier power:		300 W RMS		400 W RMS		400 W RMS
Rated power:	350 W RMS		400 W RMS		450 W RMS	
Program power:	700 W		800 W		900 W	
Connection:	2 Speaker sockets		2 Speaker sockets		2 Speaker sockets	
Signal input:		XLR L/R		XLR L/R		XLR L/R
Parallel output:		XLR L/R		XLR L/R		XLR L/R
High-pass output:		XLR L/R		XLR L/R		XLR L/R
Sensitivity:	93 dB	93 dB	94 dB	94 dB	95 dB	95 dB
Crossover frequency:		80-200 Hz		80-200 Hz		80-200 Hz
Acoustic loading:		Bassreflex		Bassreflex		Bassreflex
Amplifier:		Class D		Class D		Class D
Impedance:	8 ohms		8 ohms		8 ohms	
Dimensions (H x W x D):	575 x 500 x 450 mm	575 x 500 x 450 mm	600 x 580 x 520 mm	600 x 580 x 520 mm	665 x 665 x 590 mm	665 x 665 x 590 mm
Size of woofer:	30 cm (12")	30 cm (12")	38 cm (15")	38 cm (15")	46 cm (18")	46 cm (18")
Number of bass-woofer:	1 Pc/Pcs	1 Pc/Pcs	1 Pc/Pcs	1 Pc/Pcs	1 Pc/Pcs	1 Pc/Pcs
Frequency range:	40 - 250 Hz	40 - 250 Hz	40 - 250 Hz	40 - 250 Hz	40 - 250 Hz	40 - 250 Hz
Material:	MDF (Medium-density fibreboard)	MDF (Medium-density fibreboard)	MDF (Medium-density fibreboard)	MDF (Medium-density fibreboard)	MDF (Medium-density fibreboard)	MDF (Medium-density fibreboard)
Loudspeaker control:	8 Ohm		8 Ohm		8 Ohm	
Weight:	20.10 kg	21.90 kg	24.10 kg	26.35 kg	31.30 kg	33.65 kg

Druckfehler, technische Änderungen und Lieferbarkeit sowie Preisänderungen vorbehalten. Alle Preisangaben in Euro. National prices can be different due to local VAT rates. Misprints and omissions exempted. Technical specifications, prices and availability are subject to change. Products may differ from picture. General Conditions of the supplier are binding.